

VK-RZ/A1H Development Board for Renesas Electronics RZ/A1H ARM Cortex-A9 LSI

R7S721000VCBG#YJ0

- 400MHz, 256 BGA, Fanless

10 MByte OnChip RAM

- Can RUN without ext. SDRAM

Up to 128 MByte NOR-Flash

- QSPI, 66MHz, Quad (Burst), 8-bit
- Direct fetch is possible

Up to 128 MByte SDRAM

- 66MHz, 16-bit

2 x USB Host/Function

- USB 2.0

Micro SD

- Boot capability

USB Mini-B to UART

- RL78/G1C R5F10KBCAFP

Ethernet 10/100Base TX

- PHY: LAN8710A-EZK

CAN

- PHY: TJA1040T/VM.118

Video In:

- WXGA
- PAL
- NTSC

Video outputs:

- LVDS
- RGB

Exp. Ports:

- RZ/A1 - 97 I/O 3.3V
- RL78G1C- 19 I/O 5.0V

Debug ports:

- RZ/A1 J-TAG 2x10 pins
- RL78G1C DBG 1x5 pins

DC IN +5V


- Consumption +3.3V @ 450mA max

Operating temperature:

- -40 ... +85°

Dimensions:

- ID-2 105 x 74 mm

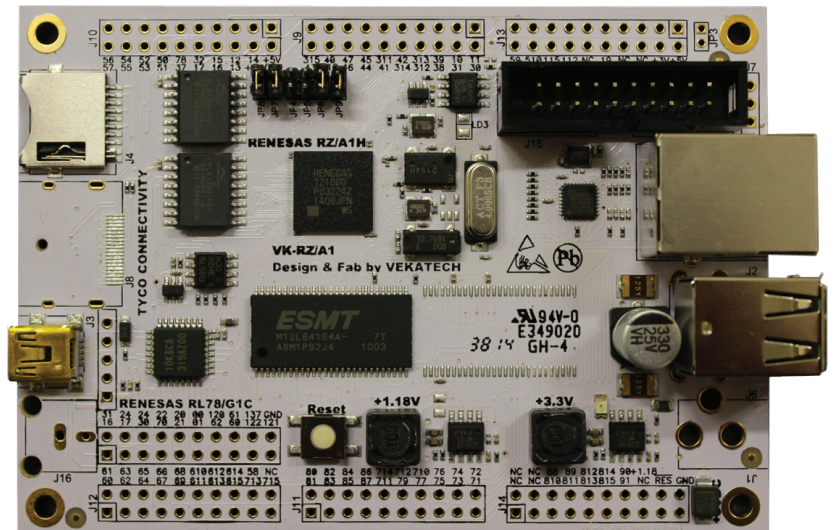

Board Support Package for:

- u-boot, Linux - GCC
- FreeRTOS - IAR
- CycloneTCP - IAR

Utilities:

- SD CARD RAM/Flash Loader

Vekatech Ltd.

59, Sankt Peterburg blvd.
4017 Plovdiv
Bulgaria
Tel.: +359 (0) 32 262362
info@vekatech.com

www.vekatech.com

